



350W

16.17 %

Module efficiency

Electrical Characteristics at Standard Test Conditions (STC)

Module Type	SPV350-PM10-120
Maximum Power - Pmax (W)	350
Maximum Power Voltage - Vmp (V)	31.06
Maximum Power Current - Imp (A)	11.27
Open-circuit Voltage - Voc (V)	36.93
Short-circuit Current - Isc (A)	11.93
Module Efficiency STC (%)	16.17 %

Tolerance of Rating Pmax /Voc/ Isc[%]: ±5/ ±4/ ±4

Electrical Characteristics at Normal Operating Cell Temperature (NOCT)


Module Type	SPV350-PM10-120
Maximum Power - Pmax (W)	260
Maximum Power Voltage - Vmp (V)	29.16
Maximum Power Current - Imp (A)	8.92
Open-circuit Voltage - Voc (V)	34.92
Short-circuit Current - Isc (A)	9.43

Temperature & Maximum Ratings

Operating Temperature (°C)	-40 °C ~ +85 °C
Nominal Operating Cell Temperature	45 ± 2 °C
Temperature Coefficients of Pmax	-0.35% / °C
Temperature Coefficients of Voc	-0.275% / °C
Temperature Coefficients of Isc	0.045% / °C
Power Tolerance	0 ~ +3W
Maximum System Voltage	1500 V
Maximum Series Fuse Rating	25 A


Mechanical Characteristics

Cell Type	Mono-crystalline
No. of Cells	120 (6x20)
Dimensions	1910x1133x30 mm
Weight	23.5 kg
Glass	3.2mm, High Transmission, Low Iron, Tempered Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP68, MC4 Compatible, 3 Bypass Diode Connector: Type PV-XT101.1[Xtong] or Type PV-KST4-EVO 2/xy UR(male) &PV-KBT4-EVO2/xy UR (female)[Stäubli]
Fire Rating	Class C
Safety Class	Class II
Packaging Configuration	1x4.0 mm ² , Length: 300 mm or Customized Length
Output Cables	72pcs/stack, 864pcs/40'HQContainer (Two pallets=One stack)

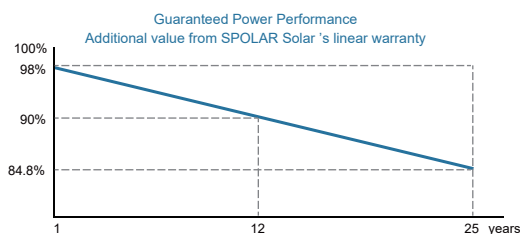

12
years
Product warranty

25
years
Linear power warranty

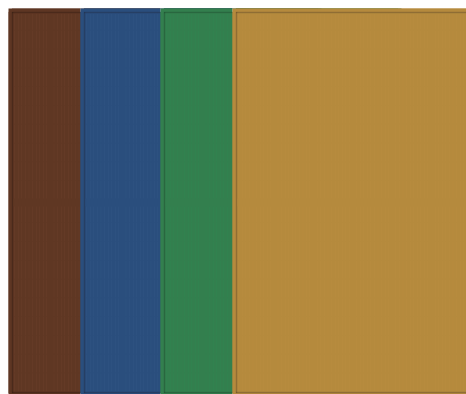

SPV350-PM10-120



Color BIPV

Innovative building-integrated photovoltaic (BIPV) designs, featuring a diverse range of color options to suit your aesthetic preferences.



Anti-reflection

Less than 20% reflectivity with minimum glare.



Good Mechanical Load

Certified to withstand: wind load (2400 Pa), snow load and hail strike(5400 Pa) .



Low Light Resilience

Advanced glass and cell surface texture designs ensure excellent performance in low light environment.



Environmental Durability

Good performance of Anti-PID & Salt mist certified by 2 PfG 2387/01.18 and IEC61701.

